



L型街渠のエプロン部と歩車道境界ブロックを一体化した製品です。

L型街渠


標準

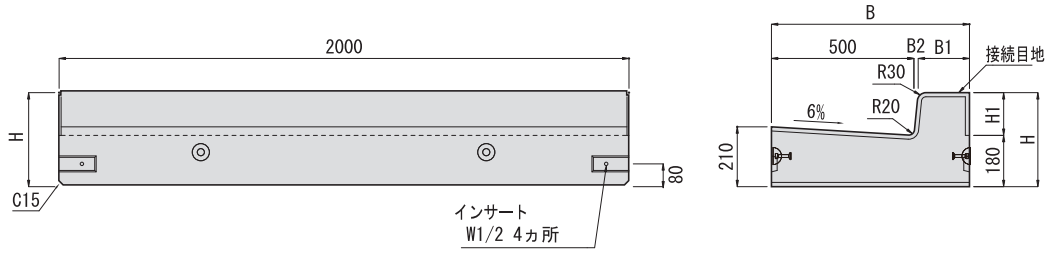


斜 h=30・20

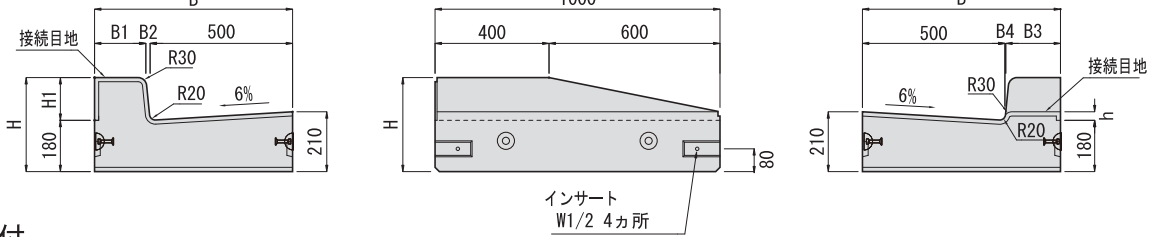


斜 段付

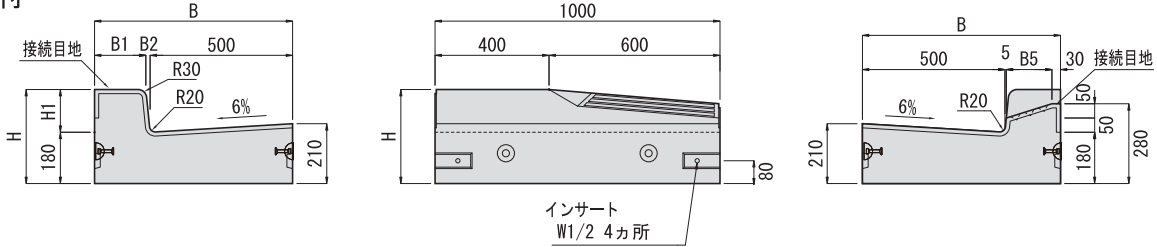

低 h=30・20

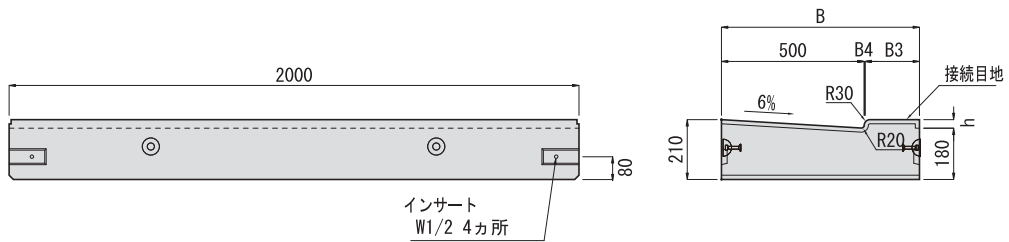

低 段付

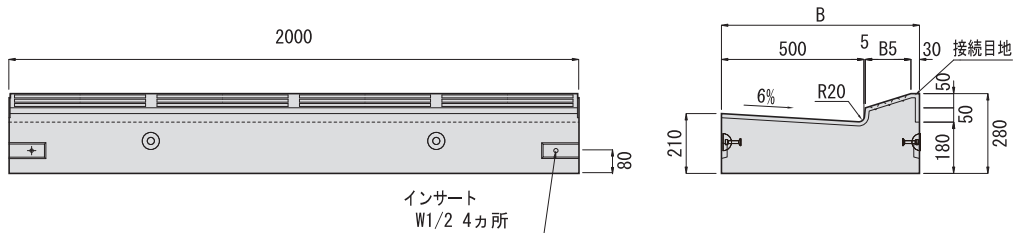

単位 (mm)

呼び名	寸法									参考重量 (kg)
	B	B1	B2	B3	B4	B5	H	H1	h	
B 標準	695	180	15	-	-	-	330	150	-	749
B 斜 h=30	"	"	"	192	3	-	"	"	30	359
B 斜 h=20	"	"	"	193	2	-	"	"	20	357
B 段付斜	"	"	"	-	-	160	"	"	-	364
B 低 h=30	"	-	-	192	3	-	-	-	30	648
B 低 h=20	"	-	-	193	2	-	-	-	20	639
B 段付低	"	-	-	-	-	160	-	-	-	688
C 斜 h=30	"	180	20	197	3	-	380	200	30	377
C 段付斜	700	"	"	-	-	165	"	"	-	382
C 低 h=30	"	-	-	197	3	-	-	-	30	653
C 段付低	"	-	-	-	-	165	-	-	-	694

※L型ブロックCは、斜h=30・斜段付および低h=30・低段付のみとなります。