
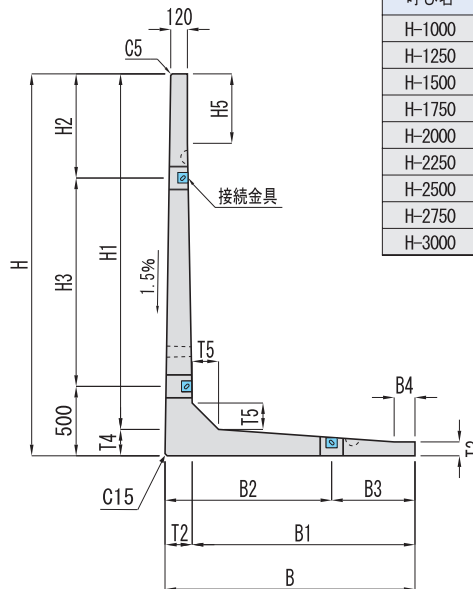
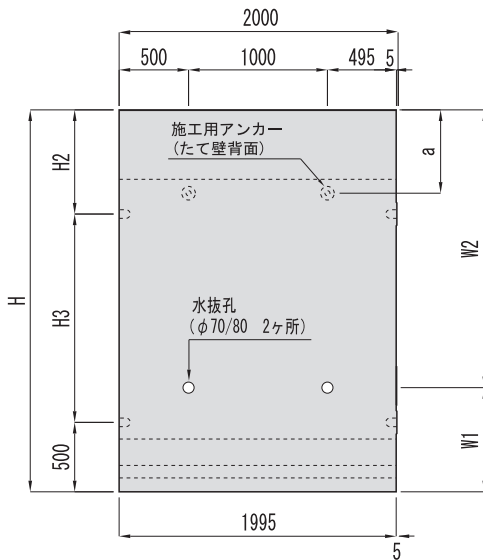


# ニューウォルコンⅢ型

国土交通大臣認定擁壁

国土交通大臣認定擁壁です。(宅地造成等規制法施行令第14条)  
高低差のある地盤の土止めとして主に宅地造成工事に使用します。

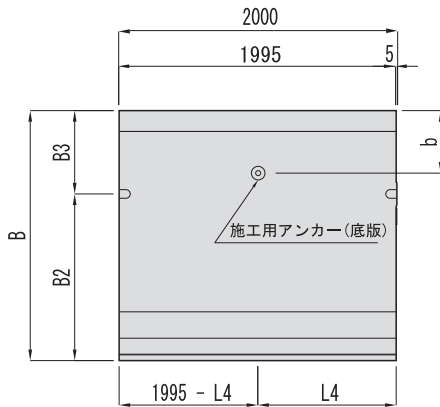

○施工用アンカー

| 呼び名    | たて壁       | 底版        |
|--------|-----------|-----------|
| H-1000 | アンカー 1t-2 | アンカー 1t-1 |
| H-1250 | " 1t-2    | " 1t-1    |
| H-1500 | " 2t-2    | " 2t-1    |
| H-1750 | " 2t-2    | " 2t-1    |
| H-2000 | " 4t-2    | " 4t-1    |
| H-2250 | " 4t-2    | " 4t-1    |
| H-2500 | " 4t-2    | " 4t-1    |
| H-2750 | " 4t-2    | " 4t-1    |
| H-3000 | " 4t-2    | " 4t-1    |

L型擁壁

単位 (mm)

| 呼び名    | 寸 法  |      |      |      |      |     |        |      |     |     |       |     |     |     |       |     |      |     |     | 参考重量<br>(kg) |
|--------|------|------|------|------|------|-----|--------|------|-----|-----|-------|-----|-----|-----|-------|-----|------|-----|-----|--------------|
|        | H    | B    | H1   | H2   | H3   | H5  | B1     | B2   | B3  | B4  | T2    | T3  | T4  | T5  | L4    | W1  | W2   | a   | b   |              |
| H-1000 | 1000 | 750  | 890  | 500  | -    | -   | 626.9  | 500  | 250 | 50  | 123.1 | 90  | 110 | 100 | 995   | 650 | 350  | 200 | 300 | 901          |
| H-1250 | 1250 | 900  | 1130 | 750  | -    | -   | 776.7  | 500  | 400 | 100 | 123.3 | 93  | 120 | 100 | 995   | 650 | 600  | 300 | 450 | 1139         |
| H-1500 | 1500 | 1100 | 1380 | 1000 | -    | -   | 976.4  | 500  | 600 | 100 | 123.6 | 93  | 120 | 120 | 942.5 | 650 | 850  | 480 | 450 | 1396         |
| H-1750 | 1750 | 1300 | 1620 | 250  | 1000 | 500 | 1166.1 | 800  | 500 | 100 | 133.9 | 100 | 130 | 130 | 942.5 | 650 | 1100 | 700 | 700 | 1727         |
| H-2000 | 2000 | 1400 | 1850 | 500  | 1000 | 500 | 1245.5 | 800  | 600 | 100 | 154.5 | 100 | 150 | 150 | 942.5 | 650 | 1350 | 700 | 750 | 2085         |
| H-2250 | 2250 | 1500 | 2090 | 750  | 1000 | 500 | 1335.2 | 800  | 700 | 100 | 164.8 | 100 | 160 | 160 | 942.5 | 650 | 1600 | 750 | 800 | 2394         |
| H-2500 | 2500 | 1700 | 2320 | 500  | 1500 | 500 | 1514.6 | 1200 | 500 | 150 | 185.4 | 100 | 180 | 180 | 942.5 | 750 | 1750 | 620 | 440 | 2877         |
| H-2750 | 2750 | 1800 | 2560 | 750  | 1500 | 500 | 1604.3 | 1200 | 600 | 150 | 195.7 | 100 | 190 | 190 | 953   | 750 | 2000 | 600 | 450 | 3233         |
| H-3000 | 3000 | 2000 | 2780 | 1000 | 1500 | 500 | 1773.7 | 1200 | 800 | 150 | 226.3 | 100 | 220 | 200 | 953   | 750 | 2250 | 650 | 450 | 3895         |